

## > Laboratory Platen Presses

### Chiller Frigo Specifications and Connections


#### Closed loop chiller (air-cooled)

with integrated re-circulating pump and buffer tank, for indoor installation.

- Removable panels for quick maintenance access
- Stainless steel water tank
- Visual and electronic minimum level indicator
- Threaded couplings for prompt connection to the user's plant
- Swivel wheels for easy positioning
- Large surface air condenser
- Patented evaporator immersed in the reservoir
- 24-month warranty on the evaporator for damages due to freeze
- Top brand hermetic refrigerant compressor
- Centrifugal pump complete with by-pass
- Digital microprocessor control for set and actual temperatures and safety alarms
- User-friendly LCD display with graphic and textual signals of all functions



- A= Cooling water outlet, 1" BSP  
 B= Cooling water inlet, 1" BSP  
 D= Filling water inlet, 1/2" BSP

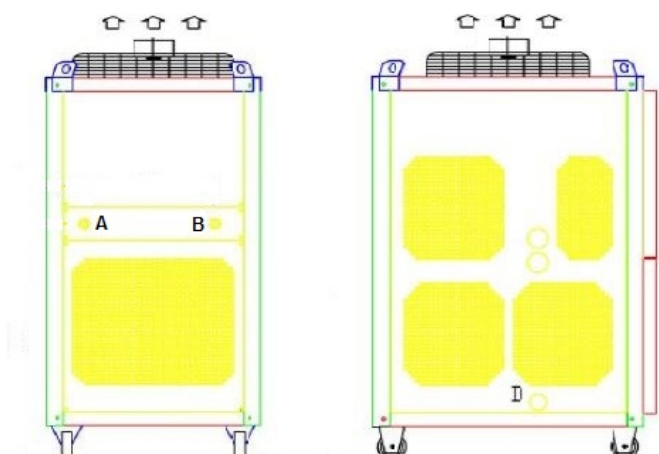

Specifications	Raca C40	Raca C100
Ven	1	2
Dimensions (lxbxh)	600x800x1230	750x1500x1450
Weight (kg)	175	440
Noise level Approx (at 10mtr)	± 71 dB	± 80 dB
Cooling agent inside	Propylenic	Propylenic
Pumping capacity (litre/h)	2600	6700
Buffer tank volume (litre)	41	120
Water Flow (l/h)	2400	6000
Voltage (with 0 and ground)	3x400V/50Hz	3x400V/50Hz
Ampere	11,6	25,5
Cooling capacity (kW at 15°C)	12,2	38,3

**FONTIJNE**  
**PRESSES**  
 When quality matters

**Fontijne Presses & Services BV**  
 Ebweg 54, 2991 LT  
 Barendrecht, The Netherlands  
 Phone: +31 (0)180-20 30 52

[www.fontijnepresses.com](http://www.fontijnepresses.com)